



## ADAPT SOUNDBAR

Introducing our award winning custom-length soundbar the SB-Adapt. Meticulously tailored to align flawlessly with your TV, setting a new standard in home audio.

Featuring a groundbreaking, patent-pending TruMount™ locking and mounting system for effortless installation, this sleek and lightweight design seamlessly melds with your TV, ensuring an unobtrusive yet powerful audio enhancement.

With racetrack-style drivers and passive radiators, brace yourself for a breathtaking audio experience that will immerse you in sound like never before. Redefine your entertainment with the perfect sound companion, where form meets function, and your TV comes to life.



### SIMPLIFY THE INSTALL PROCESS

The SB-Adapt sound bar incorporates the TruMount technology to streamline the installation process. TruAudio's TruMount toolless technology is a five-step process to ensure the correct angle of the speaker while maintaining a simple installation.



**HORIZONTAL +  
DEPTH ADJUSTMENTS**  
ON THE FLY




## INSTALLING THE SB-ADAPT

1. The Adapt soundbar can be installed in multiple ways to match any aesthetic. Choose between a wall-mount, TV mount, or table top (optional accessory) installation.

### WALL MOUNT


To mount the Adapt soundbar to the wall, simply use the included mounting bracket.

Place the bracket approximately 1.25" below the TV, find studs, and attach to the wall using your desired screws

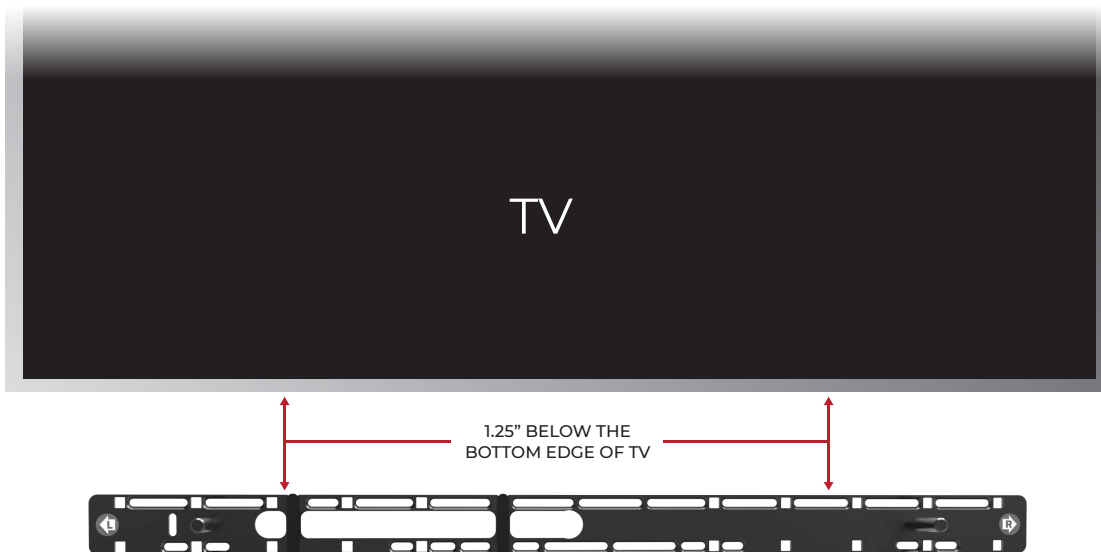

### TV MOUNT: SB-ADAPT-TVB

1. Place the TV on a non-scratching surface with the back facing up.
2. Determine which square holes to use to attach the vertical brackets or recessed brackets to the wall bracket by lining up the arms with the VESA mounting holes on the back of the tv.





Recessed  
Brackets



Vertical  
Brackets




**INSTALLING THE SB-ADAPT CONT.**

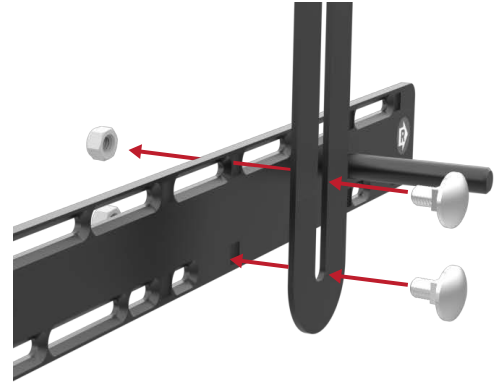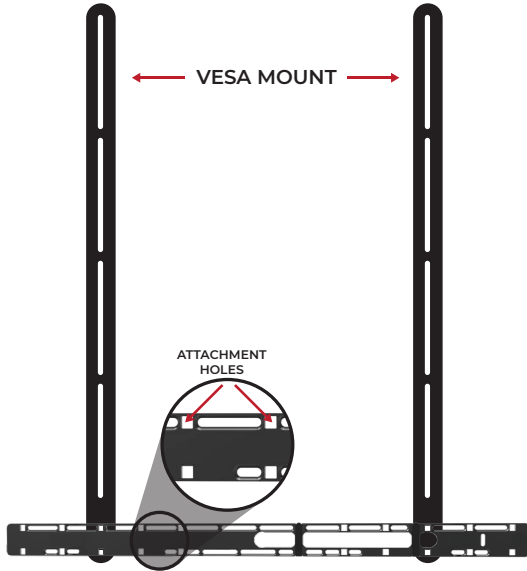

**Using the Vertical Brackets**

Attached the vertical brackets to the wall bracket using the carriage bolts and 10mm nuts.

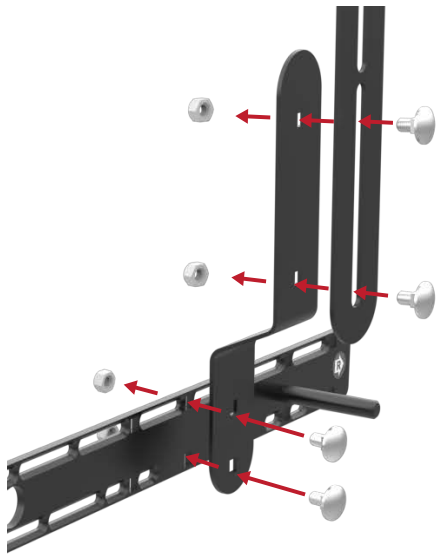

**Using the Recessed Brackets**

For Thin TVs or When Depth is Needed

Attach the recessed bracket to the vertical bracket using the two top holes. Then attach the recessed bracket to the wall mount using the bottom two holes.

**TABLE TOP: SB-STAND (OPTIONAL)**

1. Snap stand onto the SB-ADAPT housing and place on any flat surface.




### INSTALLING THE SB-ADAPT CONT.

2. Install the SB-ADAPT onto the mounting posts.



3. Run the wire through the patent-pending Front Wire Pass Through. Then, terminate the wires into the phoenix connector. Once the wires are connected, finish installing the phoenix connector.

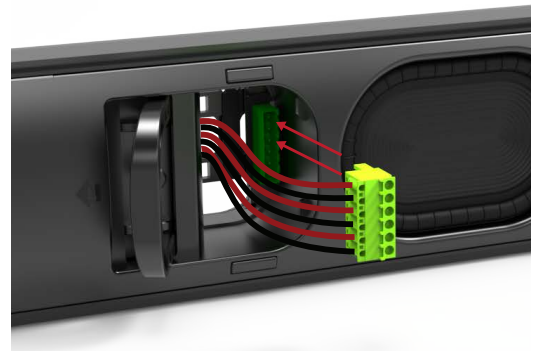

4. Adjust the angle and depth of the SB-Adapt.



5. Close the locking levers and attach the grill.





## Specifications

### SB-ADAPT-L

Speaker Type	Custom length passive LCR soundbar
Woofer:	(3) 4.5" Coated paper
Tweeter:	(3) 1" Silk soft dome
Passive Radiator	(3) 4.5" Coated paper
Power:	105W RMS, per channel
Nominal Impedance:	8Ω
Frequency Response:	90 Hz-20kHz
Max SPL:	96 dB
Sensitivity:	89 dB (2.83v / 1m)
Grill Type:	Paintable steel
Soundbar Width:	Accommodates a display from 71" to 100", (Actual soundbar width: 66.1" to 90")
Dimensions:	4.125" x 2.5" x Custom width (105mm x 64mm x Custom width)

### SB-ADAPT-S

Speaker Type	Custom length passive LCR soundbar
Woofer:	(3) 4.5" Coated paper
Tweeter:	(3) 1" Silk soft dome
Passive Radiator	(3) 4.5" Coated paper
Power:	105W RMS, per channel
Nominal Impedance:	8Ω
Frequency Response:	90 Hz-20kHz
Max SPL:	96 dB
Sensitivity:	89 dB (2.83v / 1m)
Grill Type:	Paintable steel
Soundbar Width:	Accommodates a display from 60" to 70", (Actual soundbar width: 53" to 66")
Dimensions:	4.125" x 2.5" x Custom width (105mm x 64mm x Custom width)